

Total Quality, Assured. TEST REPORT



中国认可 国际互认 TESTING **CNAS L0220**

Number:

GZHT90841557

Applicant:

WEIFANG FADA LABOR PROTECTION SUPPLIES CO.,LTD

Date:

Jun 08, 2021

ROOM 1022 SMALL COMMODITY MARKET

NO.62 QINGNIAN ROAD, WEICHENG DISTRICT,

WEIFANG CITY, SHANDONG PROVINCE, CHINA

Attn:

ZERUI HUANG

Sample Description:

Three (3) pairs of submitted samples said to be slip on occupational shoes in Black.

Standard

EN ISO 20347:2012

Size

EUR 36-37, 40-41, 44-45

Style No./Name

S085

Ref.

Surgical shoes

Colour

Black

Sole

Rubber

Upper

EVA material

Date Received/Date Test Started:

Date Final Information Confirmed/

Jun. 01, 2021

Date Payment Received:

Test Result Please Refer To Attached Page(S).

Should you have any query on this report, you may contact at gzfootwear@intertek.com

Authorized By:

For Intertek Testing Services Shenzhen Ltd.

Guangzhou Branch

Huang Ning, Andy Assistant General Manager

Page 1 Of 3

intertek

Total Quality. Assured. TEST REPORT

Tests Conducted (As Requested By The Applicant)
Slip Resistance (EN ISO 20344:2011(5.11) & ISO 13287:2012, SRC, Temperature: 23°C)

Iac MRA



中国认可 国际互认 检测 TESTING CNAS L0220

Number:

GZHT90841557

Sample	Size	Test Floor	Lubricant	Modes	Results	Requirement	Pass/Fail
-		Eurotile 2	NaLS	Forward Heel Slip (#)	0.35	Min. 0.28	Pass
	36-37			Forward Flat Slip (#)	0.45	Min. 0.32	Pass
	(Left)	Steel Floor	Glycerine	Forward Heel Slip (#)	0.24	Min. 0.13	Pass
				Forward Flat Slip (#)	0.40	Min., 0.18	Pass
		Eurotile 2	NaLS	Forward Heel Slip (#)	0.38	Min. 0.28	Pass
	40-41			Forward Flat Slip (#)	0.40	Min. 0.32	Pass
-	(Left)	Steel Floor	Glycerine	Forward Heel Slip (#)	0.26	Min. 0.13	Pass
			THE STATE OF THE S	Forward Flat Slip (#)	0.35	Min. 0.18	Pass
	20 00 0000	Eurotile 2	NaLS	Forward Heel Slip (#)	0.38	Min. 0.28	Pass
	44-45			Forward Flat Slip (#)	0.44	Min. 0.32	Pass
	(Left)	Steel Floor	Glycerine	Forward Heel Slip (#)	0.25	Min. 0.13	Pass
				Forward Flat Slip (#)	0.36	Min. 0.18	Pass

Note:

It Must Be Noted That The Slip Resistance Test Carried Out In This Report Denotes An Indication Of Slip Of This Particular Footwear/Component On The Surface Mentioned In The Test Item. It Is Important To Note That Footwear Is Subject To Many Different Conditions Encountered In Everyday Use And That It Is Impossible To Make Footwear Resistant To Slip In All Conditions. Nevertheless, It Is Generally Accepted That Problems Are Minimized If The Guideline Coefficients Of Friction Are Achieved.

Remark:

= Using Standard Shoemaking Last

Expanded Uncertainty: 0.01, With K = 2.03 At 95% Confidence Level.

intertek

Total Quality. Assured. TEST REPORT

Tests Conducted (As Requested By The Applicant)






中国认可 国际互认 检测 TESTING CNAS L0220

Number:

GZHT90841557

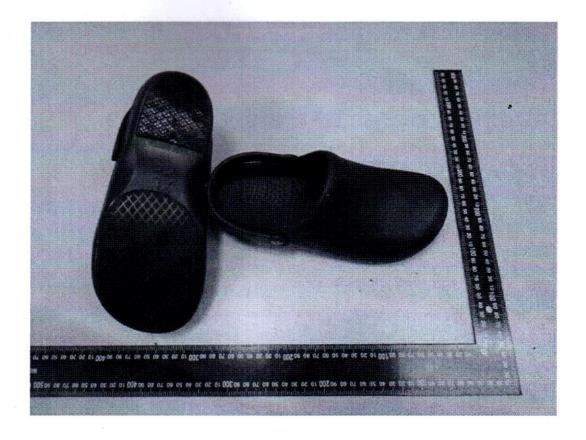

End Of Report

This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the Review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or wilful misconduct. No copy of the test report(except for full text copy) shall be made without the written approval by Intertek

/ nicoleho

Page 3 Of 3